


QTY.	PRODUCT	NEXT ASSY. DWG.	NO.	DESCRIPTION OF CHANGE	SCO#	DATE	BY
			0	NEW ISSUE		12/8/11	DSE
			1	Corrected compressed air ratings.		07/10/12	DSE
			2	Filter Element Updated		09/02/15	DSE
			3	Side Supports Updated		11/16/17	DSE
			4				


NO. RFT064/10

SUPSDS.

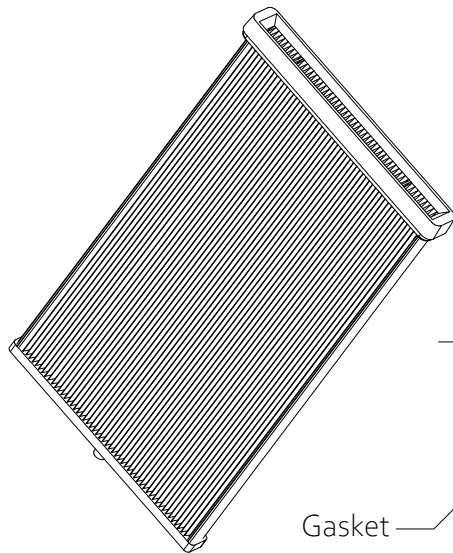

MERV Rating = 16/18 (F9/H13),
52 pleats, aprox 24 mm Pleat Height, Hard PU top and bottom, including
ø10 x 1040 mm gasket.

It is recommended that the compressed air for the cleaning/purge cycle
be set at an operating range of 4 to 5 bar, 5 bar being the MAXIMUM.

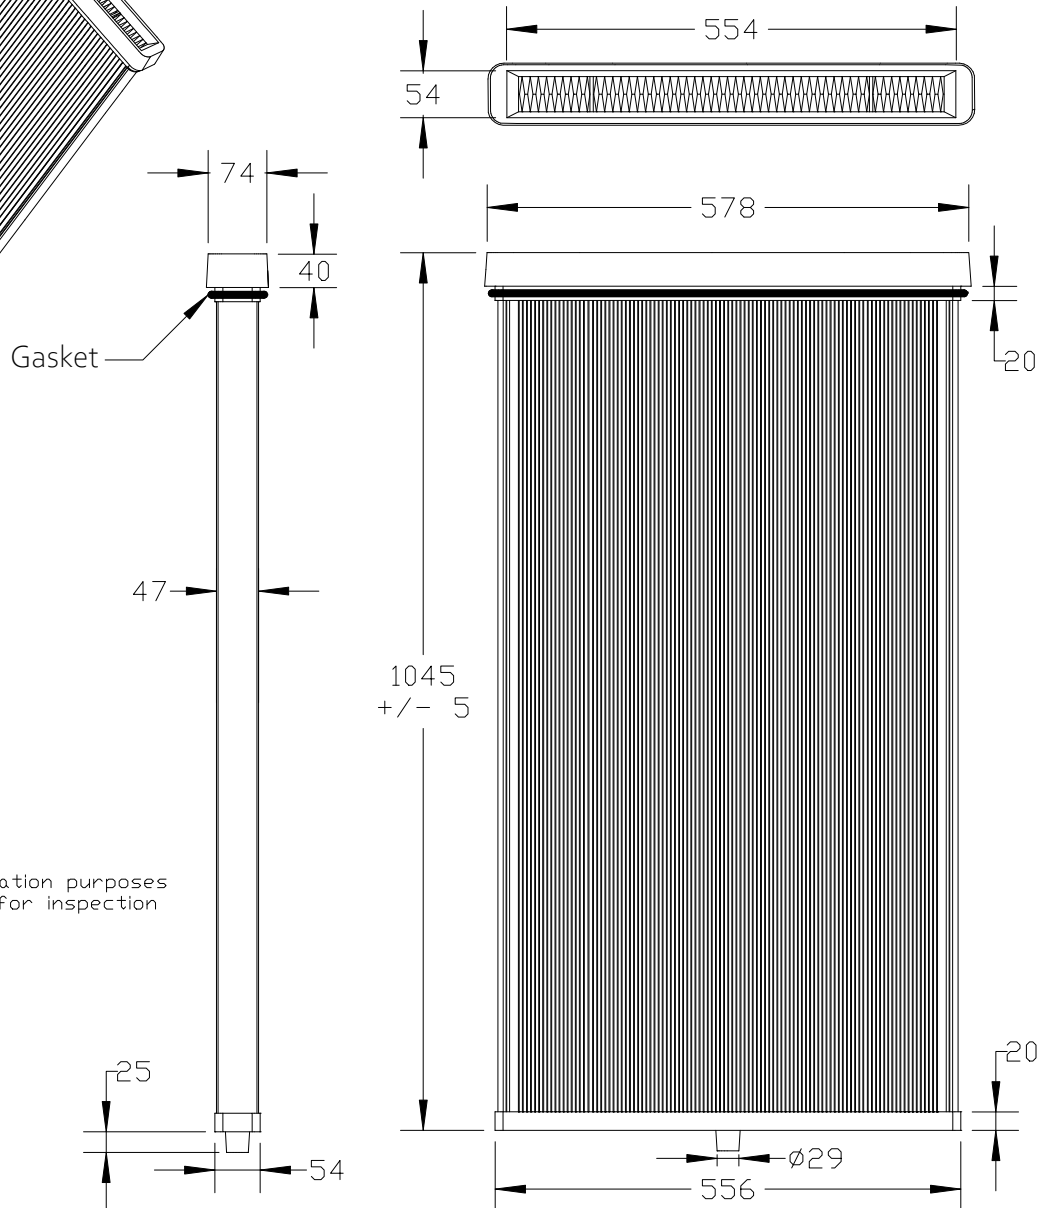

NOTE:
Dimensions are for information purposes
only & are not required for inspection
purposes.

ALL DIMENSIONS ARE IN mm



ITEM#	QTY	PART NUMBER	DESCRIPTION
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS .X ± 1 .XXX $\pm .005$ ANGLES $\pm 1/2^\circ$.XX $\pm .01$.XXX $\pm .005$			THIS DOCUMENT IS THE PROPERTY OF RICHARDSON ELECTRONICS, LTD. AND SHALL NOT BE COPIED, REPRODUCED, USED IN THE MANUFACTURE OR SALE OF APPARATUS OR DISCLOSED TO OTHERS WITHOUT PERMISSION.
DO NOT SCALE DRAWING			Richardson Electronics, Ltd.
DRAWN	DSE	SCALE	NTS
ENG. MGR.		ENG. CHKD.	
ENG. MGR.		PROD. APPD.	
MAT'L			
MAT'L SPEC. NO.	—		
FINISH	—	PROD.	
NO.			RFT064/10
CHANGE			— 3

**DUST COLLECTION FILTER
REPLACES TRUMPF P/N
0345064**