




QTY.	PRODUCT	NEXT ASSY. DWG.	NO.	DESCRIPTION OF CHANGE	SCO#	DATE	BY
			0	NEW ISSUE		01/23/17	DSE
			1				
			2				
			3				
			4				

MERV Rating = 16/18 (F9/H13),  
63 pleats, aprox 24 mm Pleat Height, Hard PU top and bottom, Aluminium  
side supports and gasket.

It is recommended that the compressed air for the cleaning/purge cycle  
be set at an operating range of 4 to 5 bar, 5 bar being the MAXIMUM.

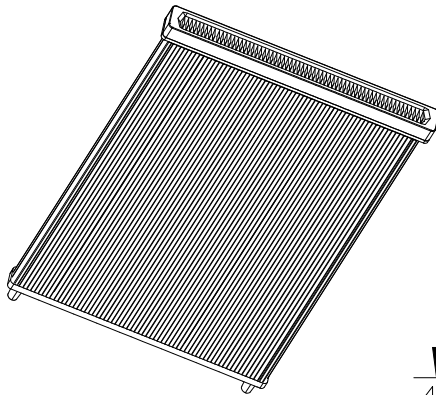

10mm Thick Gasket

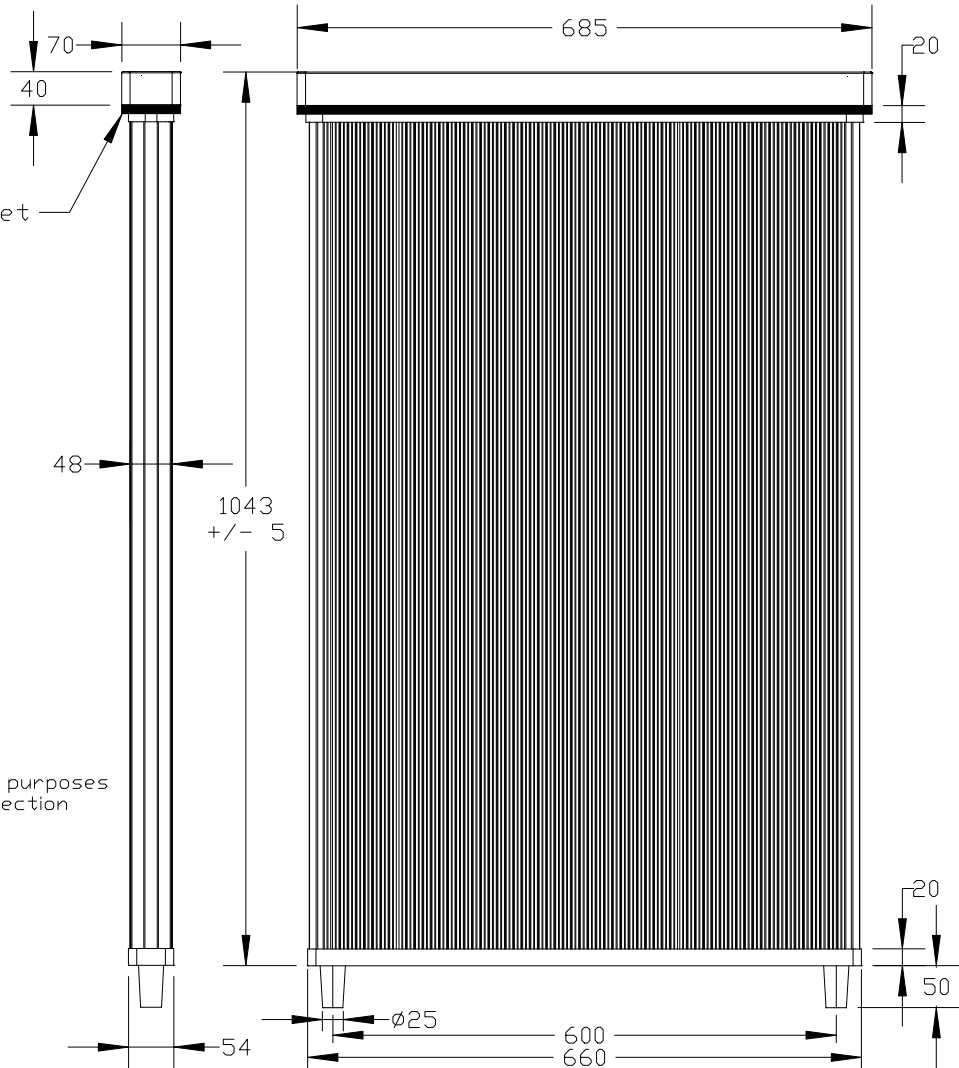

#### NOTES:

- Includes mounting hardware
- Dimensions are for information purposes only & are not required for inspection purposes.
- ALL DIMENSIONS ARE IN mm



ITEM#	QTY	PART NUMBER	DESCRIPTION
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS .X $\pm 1$ .XXX $\pm .005$ ANGLES $\pm 1/2^\circ$ .XX $\pm .01$ .XXX $\pm .005$			THIS DOCUMENT IS THE PROPERTY OF RICHARDSON ELECTRONICS, LTD. AND SHALL NOT BE COPIED, REPRODUCED, USED IN THE MANUFACTURE OR SALE OF APPARATUS OR DISCLOSED TO OTHERS WITHOUT PERMISSION.
DO NOT SCALE DRAWING			Richardson Electronics, Ltd.
DRAWN	DSE	SCALE	NTS
ENG. MGR.		ENG. CHKD.	
ENG. MGR.		PRODN. APPD.	
MAT'L			
MAT'L SPEC. NO.	—		NO.
FINISH	—	PROD.	CHANGE

**DUST COLLECTION FILTER  
REPLACES TRUMPF P/N  
0380757**

RFT757/10

— 0

NO. RFT757/10

SUPSDS.